


# SPECIFICATION SHEET

## 1HF222-SD (Soft Drinks)

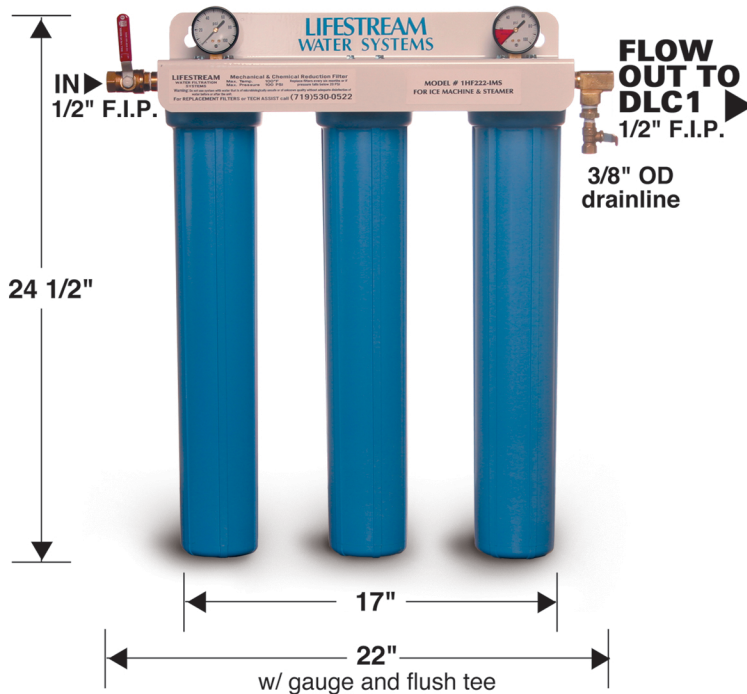

- AMETEK® GAUGES  
Meets EPA lead-free brass requirements
- BRASS® CRAFT FITTINGS  
NSF61-9 Compliant  
Meets EPA lead-free brass requirements
- B&K® BALL VALVES  
Manufactured by Mueller Ind., Inc  
NFS Standard 61 Compliant  
Meets all lead-free brass requirements.
- PENTEK™ HOUSINGS  
NFS Standard 42 Certified  
1/2" Inlet/Outlet #20 Blue
- PENTEK™ DUAL GRADIENT®  
Polypropylene Sediment Cartridge
- NFS Standard 42 Certified  
PENTEK™
- CFBC-20" Modified Carbon Block  
Cartridge with Giardia Cyst Reduction
- NFS Standard 42 Certified  
.5 µm Nominal Filtration

### Suggested uses/Applications:

Up to 3 Carbonators

### Specifications:

Maximum Temperature – 100° F.

Maximum Pressure – 100 P.S.I.

Maximum Flow Rate – 7.0 G.P.M. @ 60 P.S.I.

Inlet/Outlet Size – ½ F.I.P.

Dimensions – 24 ½ " H x 22" W x 7 ¾" D

Shipping Weight – 35 lbs.

Wet Weight – 50 lbs.

## Product Benefits of *Lifestream™* Water System model # 1HF222-SD, for Soft Drinks

- Consistent high quality beverages, with superior taste and appearance for increased customer satisfaction.
- Provide great tasting water for better carbonation and flavor.
- Reduce chlorine, chloramines, off tastes and odors, some organic chemicals and contaminants.
- Reduce sediment, particulates, suspended solids and turbidity, for better carbonation, flavor and syrup savings.
- Meets NSF Standard 42 and or FDA CFR-21 compliant materials.