
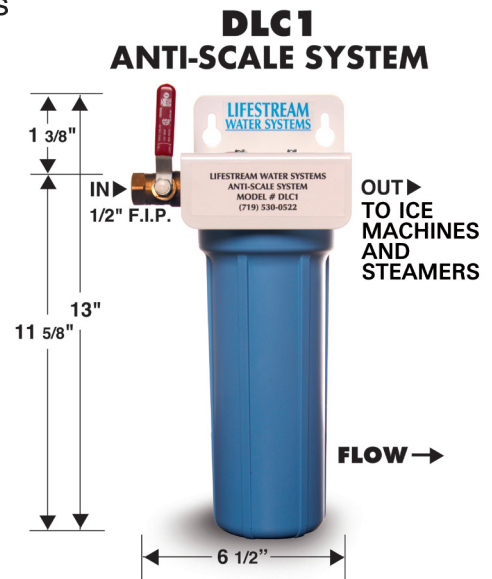




Installation Guidelines For DLC1 Anti-Scale System For Ice & Steamer With 2LSFBB High Flow System

By Lifestream Water Systems

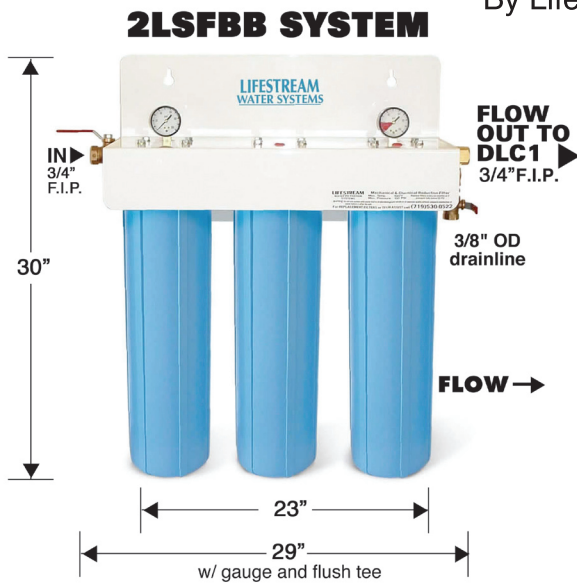

NOTE: DO NOT OVER TIGHTEN FITTINGS INTO THE FILTER HEADS. OVER TIGHTENING WILL RESULT IN A POSSIBLE PORT FRACTURE.

1. All housings must be protected from freezing.
2. Observe the maximum pressure for the unit you are installing. If pressure exceeds 100 psi rated pressure, use a pressure regulator.
3. If a single mounting bracket is supplied with your unit, remove it from the head and invert it before mounting. Always be certain that you securely mount the unit as the pipe may not support it.
4. Observe the maximum temperature of your unit and do not exceed 100° temperature.
5. Water flow direction is located on the top of the unit (by in & out or arrow). Ensure water flow direction is correct.
6. The housing head must be mounted horizontally so that the sump is directly below the dispenser head.

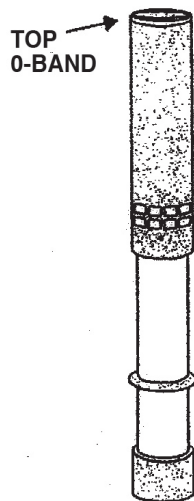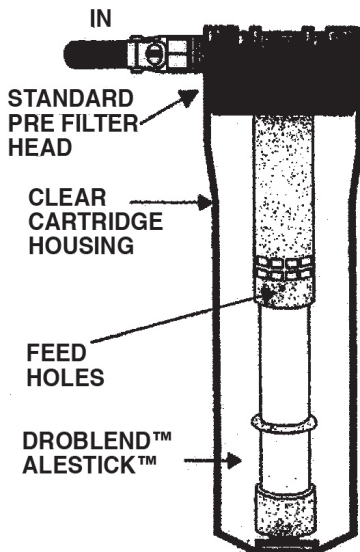

DLC1 Anti-Scale Scalestick™ Installation & Replacement

1. Turn off water
2. Ensure that the o-band is in place on the top of the ScaleStick™.
3. Push the ScaleStick™ up into the filter head and allow the O-band to hold the ScaleStick™ suspended vertically.
4. Screw on the housing & turn on water.
5. To replace the ScaleStick™, turn off water supply, unscrew the housing and remove the spent ScaleStick™ per above steps.

The ScaleStick filter housings are rated for cold water use to temperatures not exceeding 100°F. If feed water temperatures exceed 100°F, use hot water feed housings.

Over time, the product in the ScaleStick™ between the feed holes and bottom will slowly dissolve and the level will drop. Replace the ScaleStick™ when the product level reaches the bottom.

The maximum allowable dosage of the media PHOS-HW, PHOS-CW, & PHOS-FE under NSF Standard 60 is 10 mg/l.

TROUBLESHOOTING

NO CHEMICAL USAGE:

Feed holes in the ScaleStick™ may become clogged from foreign material in lines if pre-filtration is not used.
Solution: Cut the incoming water to the unit off and remove the ScaleStick™ and clean feed holes.

ENLARGEMENT OF FEED HOLES OR FAILURE TO FOLLOW DIRECTIONS WILL VOID WARRANTY

www.lifestreamsystemsinc.com • 719-530-0522